

Datablad

Art. Nr. **495350**

Benämning **BEST ONE-AUT**




Rostfria dränkbara läns-pumpar av högsta kvalitet för pumpning av lätt förorenat vatten/ gråvatten. Pumphus, motorhölje, pumphjul, diffusor och bottensil av rostfritt stål AISI 304 (SIS 2333).

Axel av rostfritt stål med utbytbara lager och utbytbar pumpaxeltätning hylsa belagd med keramisk yta. Best One har en oljesmord mekanisk axeltätning samt en enkel läppringstättning i NBR mot motor sidan. Best One MS levereras med integrerad nivå ottör som startar vid 170 mm och stoppar vid 100 mm. Max (Mjuk)partikelstorlek i vattnet 10 mm. Max vattentemperatur 50°C Anslutningskabel 10m. Best One MS 5 m Max nedsänkingsdjup 5 meter.


Search Parameters

Liquid	Water
Temperature	20°C
Date	2022-07-05 20:27:12

Performance Curves

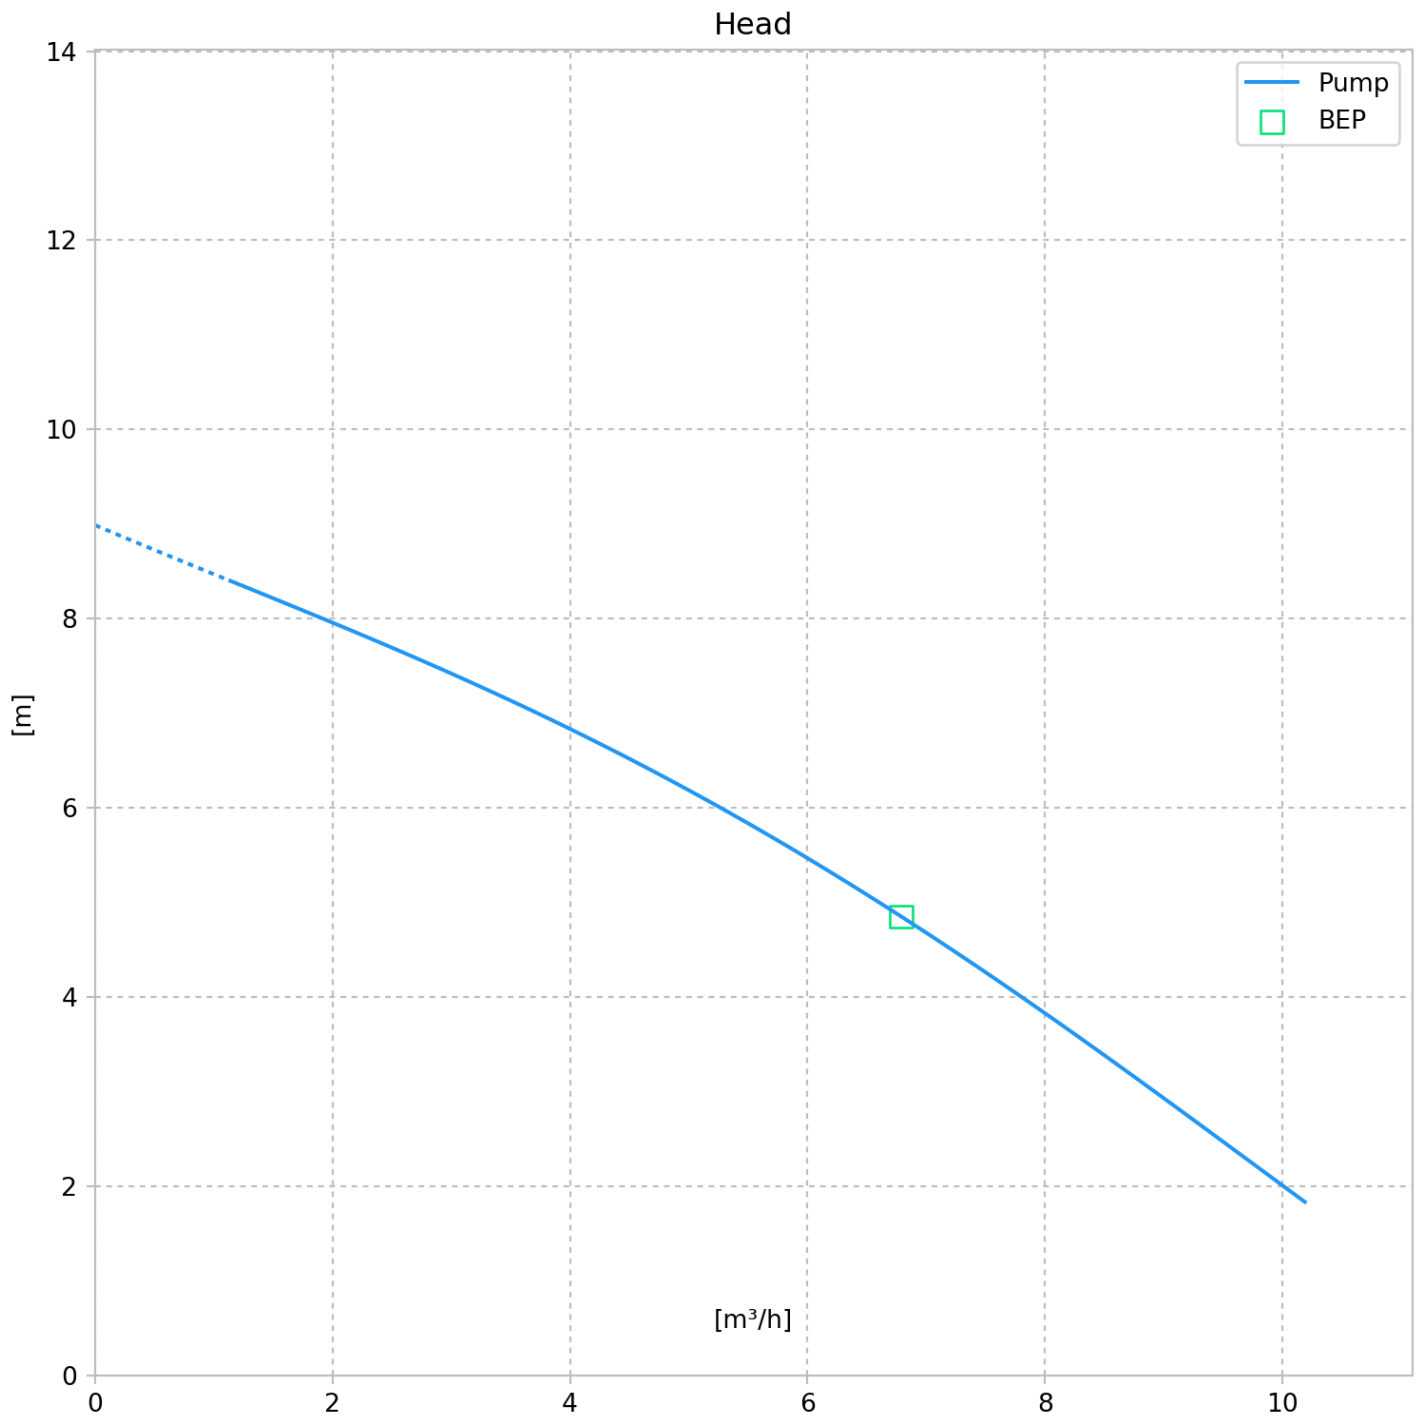

Drawings

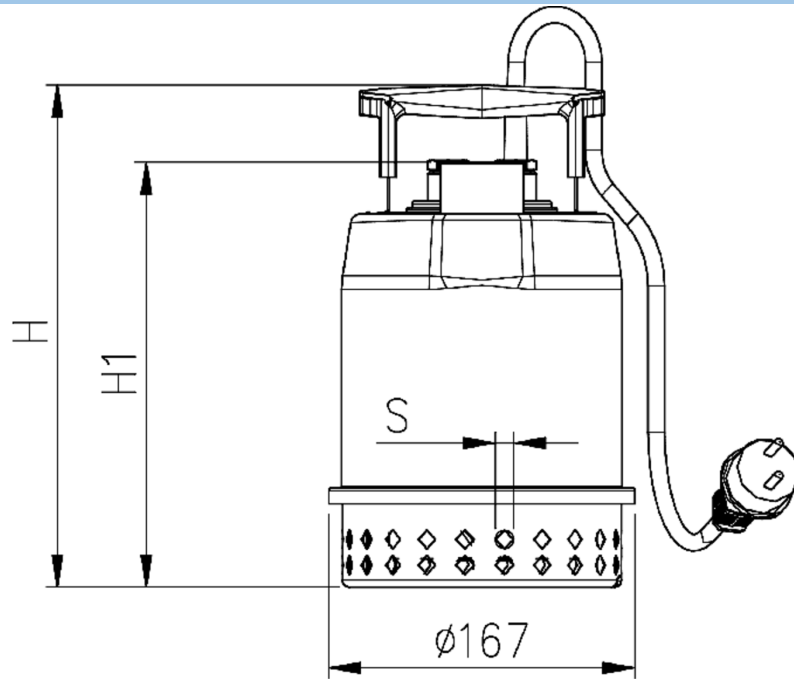

Pump weight On demand kg

Dimensions [mm]

H	273
H1	231
S	10
Weight PUMP	4.3 kg

Dimensions [mm]

H	273
H1	231
S	10
Weight PUMP	4.3 kg

Technical Specifications

Materials

Casing	AISI 304
Impeller	AISI 304
Shaft	AISI 303 + AISI 303 ceramic coated shaft sleeve

Motor

1-phase / 3-phase	1~
Capacitor	8 μ F
Code starting mode	Unbek
Corrected motor power	0.25 kW
Currents	2.3 A
Degree of protection	IP 68
Efficiencies	-
Efficiency	- %
Frequency	50 Hz
Full name	230V
Insulation class	F
Item name	BEST ONE M_230_Single Phase
Item price coding	PRICE
Make	EPE Standard
Max. shaft power	0 kW
Motor design	Submersible dry type
Motor power at operating speed	- kW
Name	BEST ONE M_230_Single Phase
No. starts per hour	40
Nominal speed	2800 1/min
Number of poles	2
Pole pairs	1
Power correction DIN VDE 0530	0.25 kW
Rated current	2.3 A
Rated power	0.25 kW
Rated torque	0.85262 Nm
Rated voltage	230 V
Sel. degree of protection	IP 68
Sel. voltage name	230V
Service factor	1
Speed	2800 1/min
Stages	1
Starting mode	Unknown
Temperature coefficient	No data

Title of the main position

BEST ONE M_230_Single Phase

Voltages

230 V